PELICAN[™]

SEE OUR FULL LINE PELICAN.COM OF PRODUCTS AT:



PELICAN LIGHTING TOOLS

- Safety Approved lights for hazardous locations
- Specialized lights for fire and rescue operations
- Headlamps
- Submersible lights for diving



PELICAN REMOTE AREA LIGHTS

- Solid-state mounted LEDs
- Portable
- Multi-directional lamp heads
- Up to 15 hours of burn time
- Rechargeable



PELICAN-HARDIGG[™]SINGLE LID CASES

- Rotational Molding Technology
- Recessed hardware
- Comfort Grip Handles
- Available airtight/watertight designs
- Over 300 sizes
- Built-in skid runners option available on select models
- Mobile Military solutions for Medical, Information Technology, Office, Armory, and Transport Logistics
- Reinforced corners and edges for impact protection

U.S.A.

CALIFORNIA 23215 Early Avenue Torrance, CA 90505 Tel: 310.326.4700 800.473.5422 Fax: 310.326.3311 www.pelican.com

Pelican Products Australia

MASSACHUSETTS 147 North Main Street South Deerfield, MA 01373

Tel: 800.542.7344

Fax: 413.665.8330

www.pelican.com

Suite 2.33 West Wing,

Tel: +612 4367 7022

Fax: +612 4367 7066

www.pelicanaustralia.com

Platinum Building 4 Ilya Av Erina NSW 2250

CANADA Pelican Products ULC 10221-184th Street Edmonton, Alberta T5S 2J4 Canada Tel: +780 481 6076 Fax: +780 481 9586

Pelican Products and Services India Pvt. Ltd Level "4", Augusta Point, Sector-53, Golf Course Road, Gurgaon 1 22002 Haryana, India Tel: +91 124 4354148 Fax: +91 124 4354001



All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates.

INTERNATIONAL

EUROPE, MIDDLE EAST AND AFRICA Peli Products, S.L.U.

c/ Provença, 388, Planta 7 08025 · Barcelona, Spain Tel: +34 934 674 999 Fax: +34 934 877 393

Pelican Products China Representative Office Pine City Building, Room 1026 777 Zhaojiabang Road Shanghai, China 200032 Tel: +86 21 64189685 Fax: +86 21 64189679 www.pelican.com/cn

SE ASIA and rest of ASIA (Hong Kong, Macau, Taiwan, Sri Lanka)

Pelican Products Singapore Pte Ltd 30 Merchant Road #02-08 Riverside Point Singapore 058282 Phone: +65 64385418 www.pelican.com

23215 Early Avenue

DISTRIBUTED BY:

LIFETIME GUARANTEE OF EXCELLENCE

Pelican Products K.K. Nisso 22 Bldg 9F 1-11-10 Azabu Dai Minato ward Tokyo 106-0041 Japan Tel: +81 33 585 9100 Fax: +81 33 585 9109 www.pelican.com/jp

KOREA

Pelican Products Korea Ltd #2616 Hyundai 41 Tower, 917-9, Mok-dong, Yangchon-gu, Seoul, Korea Tel: +82 2 6092 4700 Fax: +82 2 6739 4700

LATIN AMERICA

Torrance, California 90505 USA Tel: +1 310-326-4700 x 1462 Fax: +1 310-325-5740





> SMALL CASES

You've got equipment to protect, and a Pelican Storm Case is the best way to do it. Why? It's all about the resin: our proprietary HPX® polymer is proven to resist impacts even in low-temperature laboratory testing. But the real proof is in the bragging rights that come with survival. Because

iM2100

to a Pelican Storm Case, whether falling from a helicopter, crashing down class V rapids or taking a hit in the center lane of the New Jersey turnpike is all in a day's work.

iM2075



Press & Pull® Latches

These smooth-opening, dependable, patented latches hold tight under pressure and impact despite fast-opening performance. Tested to over 400 lbs., yet open with a simple release button.

Molded-In Lockable Hasps

Twin mating hasp holes on the rim of the case allow attachment of padlocks to keep your gear in and thieves out. And check out Pelican's TSA approved cable padlock. Now you can check your baggage with confidence while flying in the USA. The Travel Security Agency has the key, and you have the combination.
















Rugged In-Line Wheels


Shielded from dust, dirt and other contaminants – ball bearing wheels provide low-friction, low-drag rolling with retractable handles for easy movement of heavy loads. Look for the of icon for availability on select models.

Double-Layer, Soft-Grip Handles

When the weather goes south you'll find a secure grip that won't slip. An in-tool vulcanizing process over-molds the grips to the polymer handle for a lifetime of dependable performance.



The built-in technology of Pelican Storm Cases automatic pressure equalization valve is also a patented feature. Air travel prevents vacuum lock to make opening the case natural even after extreme altitude changes. At the same time, the microscopic filter blocks water molecules and dust particles so your gear

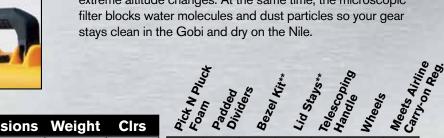

					3	0	0 %	6		<i>b</i>	9
CAT #	Interior Dimensions*	Exterior Dimensions	Weight	Clrs	P. C.	Pada Diid	Beze	Lids	relesc Hans	Whee	Meet
iM2050	9.5" L x 7.5" W x 4.25" H (24.1 x 19 x 10.8 cm)	11.8" L x 9.8" W x 4.7" H (30 x 24.9 x 11.9 cm)	2.7 lbs. (1.2 kg)		S	0	0	0			S
iM2075	9.5" L x 7.5" W x 7.25" H (24.1 x 19 x 18.4 cm)	11.8" L x 9.8" W x 7.7" H (30 x 24.9 x 19.6 cm)	3.3 lbs. (1.5 kg)		S	0	0	0			s
iM2100	13" L x 9.2" W x 6" H (33 x 23.4 x 15.2 cm)	14.2" L x 11.4" W x 6.5" H (36.1 x 28.9 x 16.5 cm)	4.2 lbs. (1.9 kg)		S	0	0	0			s
iM2200	15" L x 10.5" W x 6" H (38.1 x 26.7 x 15.2 cm)	16.2" L x 12.7" W x 6.6" H (41.1 x 32.2 x 16.8 cm)	4.9 lbs. (2.2 kg)		s	0	0	0			s
iM2300	17" L x 11.7" W x 6.2" H (43.2 x 29.7 x 15.7 cm)	18.2" L x 13.4" W x 6.7" H (46.2 x 34 x 17 cm)	5.8 lbs. (2.6 kg)		s	0	0	0			s
iM2306	17" L x 6.3" W x 6.2" H (43.2 x 16 x 15.7 cm)	18.2" L x 8.4" W x 6.7" H (46.2 x 21.3 x 17 cm)	4.3 lbs. (2.0 kg)		s	0	0	0			s
iM2370	18.2" L x 12.1" W x 5.2" H (46.2 x 30.7 x 13.2 cm)	20" L x 14.7" W x 5.8" H (50.8 x 37.3 x 14.7 cm)	5.7 lbs. (2.6 kg)		s	0	0	0			s
iM2400	18" L x 13" W x 6.7" H (45.7 x 33 x 17 cm)	19.2" L x 15.2" W x 7.3" H (48.7 x 38.6 x 18.5 cm)	6.5 lbs. (3.0 kg)		S	0	0	0			s
iM2435	17.50" x 6.50" x 15.50" (44.4 x 16.5 x 39.4 cm)	18.63" x 9.25" x 16.50" (47.3 x 23.5 x 41.9 cm)	10 lbs. (4.5 kg)		S	0			s	S	s
iM2450	18" L x 13" W x 8.4" H (45.7 x 33 x 21.3 cm)	19.2" L x 15.2" W x 9" H (48.7 x 38.6 x 22.9 cm)	7.4 lbs. (3.4 kg)		S	0	0	0			s
iM2500	20.5" L x 11.5" W x 7.2" H (52 x 29.2 x 18.3 cm)	21.7" L x 14.1" W x 8.9" H (55.1 x 35.8 x 22.6 cm)	11 lbs. (5.0 kg)		S	0	0	0	s	S	s
iM2600	20" L x 14" W x 7.7" H (50.8 x 35.5 x 19.6 cm)	21.2" L x 16" W x 8.3" H (53.8 x 40.6 x 21.1 cm)	8.5 lbs. (3.9 kg)		s	0	0	0			
iM2620	20" L x 14" W x 10" H (50.8 x 35.5 x 25.4 cm)	21.2" L x 16" W x 10.6" H (53.8 x 40.6 x 26.9 cm)	12.5 lbs. (5.7 kg)		S	0	0	0	s	s	
iM2700	22" L x 17" W x 8" H (55.9 x 43.2 x 20.3 cm)	24.6" L x 19.7" W x 8.6" H (62.5 x 50 x 21.8 cm)	11.1 lbs. (5.0 kg)		S	0	0	0			
iM2720	22" L x 17" W x 10" H (55.9 x 43.2 x 25.4 cm)	24.6" L x 19.7" W x 11.7" H (62.5 x 50 x 29.7 cm)	16.8 lbs. (7.6 kg)		S	0	0	0	S	S	
iM2750	22" L x 17" W x 12.7" H (55.9 x 43.2 x 32.2 cm)	24.6" L x 19.7" W x 14.4" H (62.5 x 50 x 36.6 cm)	18.5 lbs. (8.4 kg)		S	0	0	0	s	s	
iM2875	22.5" L x 21.1" W x 11.4" H (57.1 x 53.6 x 28.9 cm)	24.9" L x 23.7" W x 13.1" H (63.2 x 60.2 x 33.3 cm)	20.1 lbs. (9.1 kg)		S	0	0	0	s	s	
iM2950	29" L x 18" W x 10.5" H (73.6 x 45.7 x 26.7 cm)	31.3" L x 20.4" W x 12.2" H (79.5 x 51.8 x 31 cm)	20.8 lbs. (9.5 kg)		S	0	0	0	s	s	
iM2975	29" L x 18" W x 13.8" H (73.6 x 45.7 x 35 cm)	31.3" L x 20.4" W x 15.5" H (79.5 x 51.8 x 39.4 cm)	22.5 lbs. (10.2 kg)		S	0	0	0	S	S	
iM3075	29.8" L x 20.8" W x 17.8" H (75.7 x 52.8 x 45.2 cm)	33.3" L x 24.4" W x 19.3" H (84.5 x 62 x 49 cm)	31.5 lbs. (14.3 kg)		S	0	0	0	s	S	
iM3100	36.5" L x 14" W x 6" H (92.7 x 35.5 x 15.2 cm)	39.8" L x 16.5" W x 6.7" H (101.1 x 41.9 x 17 cm)	15.2 lbs. (6.9 kg)							S	
iM3200	44" L x 14" W x 6" H (111.7 x 35.5 x 15.2 cm)	47.2" L x 16.5" W x 6.7" H (119.8 x 41.9 x 17 cm)	17.7 lbs. (8.0 kg)		S (standard), O (optional) -**Available as add-on kits only. Require additional assembly					S	
iM3220	44" L x 14" W x 8.5" H (111.7 x 35.5 x 21.6 cm)	47.2" L x 16.5" W x 9.2" H (119.8 x 41.9 x 23.4 cm)	20.4 lbs. (9.3 kg)		- All cases available with no foam as an option iM3100 through iM3300 come with multilayer foam					S	
iM3300	50.5" L x 14" W x 6" H (128.2 x 35.5 x 15.2 cm)	53.8" L x 16.5" W x 6.7" H (136.6 x 41.9 x 17 cm)	19 lbs. (8.6 kg)							S	

^{*} Lid height included in interior dimensions:
iM2050-iM2075 1.5 inch (3.8 cm) lid. iM2370 1.7 inch (4.3 cm) lid. iM3075 4 inch (10.2 cm) lid. iM2100-3300 2 inch (5.1 cm) lid.